

## Description

Mar/UV-resistant Lexan MR10 sheet combines the impact strength of Lexan polycarbonate sheet with a proprietary abrasion/UV resistant surface that approaches glass in performance. Lexan MR10 Sheet with Margard coating backed by a ten-year limited warranty against yellowing, abrasion resistance, breakage, loss of light transmission, and coating failure<sup>£</sup>.) Lexan MR10 sheet's unique coating is graffiti-resistant enabling restoration to a like-new condition. In addition, Lexan MR10 sheet offers improved resistance to weathering as well as forced-entry protection. It is an excellent candidate for use in stores, public buildings, schools, bus shelters and other high traffic areas. Lexan MR10 sheet is for transparent applications only. Because of its high mar-resistant surface, paint, adhesives and other materials will not adhere to its surface. The coating is applied to both sides, therefore helps eliminate second-surface decoration. Also due to its mar-resistant coating, Lexan MR10 sheet cannot be cold-formed.

## Typical Property Values ♦

Property	Test Method	Unit	Value
<b>Physical</b>			
Specific Gravity (color dependent)	ASTM D792	-	1.20
Light Transmission (Average), 1/8" Thick	ASTM D1003	%	88
Chemical Resistance	ANSI Z26.1	-	Passes <sup>#</sup>
<b>Mechanical</b>			
Tensile Strength, Ultimate	ASTM D638	psi	9,500
Flexural Strength	ASTM D790	psi	13,500
Flexural Endurance @ 1,800 Cycles/Min, 73°F, 50% RH	ASTM D671	psi	1,000
Compressive Strength	ASTM D696	psi	12,500
Modulus of Elasticity	ASTM D638	psi	340,000
Drop Ball Impact Strength <sup>‡</sup>	SABIC Test	ft-lbs	
@ 73°F			>200
@ 32°F			>200
@ 0°F			>200
<b>Thermal</b>			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x 10 <sup>-5</sup>
Heat Deflection Temperature @ 264 psi	ASTM D648	°F	270
<b>Flammability</b>			
Horizontal Burn (Flame Spread) AEB	ASTM D635	in	<1
Ignition Temperature Flash Self	ASTM D1929	°F	873 1,076

♦ These typical values are not intended for specification purposes. If minimum certifiable properties are required please contact your local SABIC Innovative Plastics' representative.

‡ 5-lb steel ball dropped from a height of 40 feet

\* Trademarks of SABIC Innovative Plastics IP BV

£ Request details of limited ten-year warranty plus cleaning and maintenance instructions.

# Gasoline and kerosene - no tackiness, crazing or loss of transparency for a minimum of 48 hours.

## Abrasion Resistance Comparison


Lexan MR101 sheet exhibits significantly less hazing than uncoated polycarbonate sheet as shown in the abrasion resistance chart.

	Test Method	% Haze		
		Uncoated Polycarbonate	Lexan MR10 Sheet	Glass
Taber Abrasion 100 Cycles CS 10F	ASTM D 1044 Z26.1	35.0	1-3	0.5

\* The Taber Abrader test measures the percent of change in haze that results from the grinding action of two abrasive impregnated wheels on the test samples. A constant load of 500 grams is maintained as the samples rotate on a turntable for a predetermined number of revolutions.

## Impact Resistance

¼" Lexan MR10 sheet  
¼" Acrylic  
¼" Tempered Glass  
¼" Laminated Glass

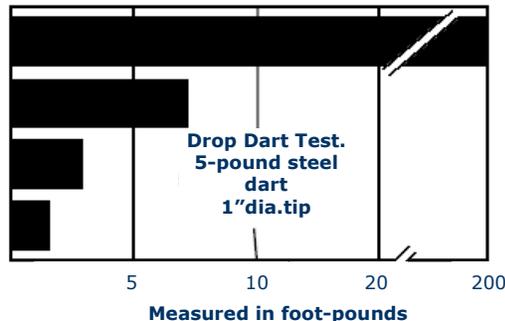

## Code Compliance

Lexan MR10 sheet meets the requirements of all major model building codes

- Model Building Code Organizations: The Approved Light Transmitting Plastics requirements set by the three major Model Building Code organizations (BOCA, ICBO, and SBCCI) and Dade County. Lexan MR10 sheet meets the highest rating—Class CC1 Approved Plastic.
- Underwriters Laboratories: Lexan MR10 sheet is listed as a Burglary-Resisting Glazing Material according to UL Standard 972.
- CPSC: 16 CFR 1201, I, II: Lexan MR10 sheet complies with the Consumer Product Safety Commission's Safety Standard for architectural glazing materials for both Category I and Category II applications.



\* Trademark of SABIC Innovative Plastics IP BV

### Americas:

SABIC Innovative Plastics  
Specialty Film & Sheet  
One Plastics Avenue  
Pittsfield, MA 01201, USA  
Tel. (1) (413) 448 5400  
Fax. (1) (413) 448 7506  
Toll free: 1-800 451 3147

### Europe:

SABIC Innovative Plastics  
Specialty Film & Sheet  
Plasticslaan 1  
NL - 4612 PX Bergen op Zoom  
The Netherlands  
Tel. (31) (164) 292911  
Fax. (31) (164) 293272

### Pacific:

SABIC Innovative Plastics  
Specialty Film & Sheet  
1266 Nanjing Road (W)  
16th Floor, Plaza 66  
200040 Shanghai, China  
Tel. (86) 21 6288 1088  
Fax. (86) 21 6288 0818

THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com> AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC Innovative Plastics is a trademark of Sabic Holding Europe BV

\* Trademarks of SABIC Innovative Plastics IP BV